



MAGITECH

INFRABUILD PVT. LTD.

**WE BUILD
OUR PRODUCTS TO REPRESENT
OUR VALUES**

THE SMART CHOICE

www.magitech.co.in

Magitech Expertise in Exporting, Trading, and Supplying Robust and Effective Wall Putty, Block Joint Mortar, Epoxy Grout, Water Proofing Products Ready Mix Plaster, Tiles Adhesive, and other Construction Products. Since its Inception, Magitech Has Witnessed Immense Prosperity Which Can Be Attributed To its Policy Of Providing The Highest Grade Products With No Compromise in The Quality by Maintaining and Adhering to Strict Manufacturing Standards.

Magitech Has its Roots Wide Spread Across The Western Region of The Country, Magitech's Immense Capability To Deliver the Best Quality Products is Due to its Massive Production Capacity and Effective Logistic System. this Ensures that the Prescribed Quantity of Stock is Delivered in a Timely Manner. Magitech's Endowed and Skilled Team Strives Hard for Hassle Free Customer Experience with a Strong Belief of Customers as Their Biggest Assets.

V I S I O N

We are Focused to Serve the Industry by Innovative Construction Materials and Setting Standards of Quality, Value, Commitment, Service to Our Valued Customers.

M I S S I O N

To Reduce the Adverse Impact On Enviroments Due to Various Development and Recreation a Activities. To Introduce Innovation and Implement Efficient, Energy Saving, Waste Reduction Techniques in Our Products and Services.



- 01 **Magitech Smartset Wall Putty**
Rough Wall Putty | Fine wall Putty
- 02 **Magitech Smartfix Tile Adhesive**
NSA Silver | NSA Gold | NSA Platinum | NSA Platinum White
- 03 **Magitech Smartjoint Block Joint Mortar**
- 04 **Magitech Smartpoxy Epoxy Grout**
Sparkle | Non Sparkle
- 05 **Magitech Tilesealer Grout**
- 06 **Magitech Smartbase Floor Hardner**
- 07 **Magitech Smartex wall Texture**
- 08 **Magitech Build Plast Ready Mix Plaster**
- 09 **Magitech MW+**
- 10 **Magitech Smartseal Crack fill**
- 11 **Magitech Waterproofing Chemicals**
Magitech Makpoxy Adhesive | Magitech Smartsolid Membrane
Magitech PrimeCoat Transparent | Magitech Smarter SBR
Magitech SmartCover Demp Proof
- 12 **Magitech Tiles Spacer**
- 13 **Magitech Tiles Cleaner**
- 14 **Magitech Paints**
Magitech Interior Emulsion | Magitech Buildup Primer
Magitech Exterior Emulsion | Magitech Pure Distemper



SMART SET WALL PUTTY



01



What is Magitech Smart Set Wall Putty :

"Magitech Smart Set Wall Putty" is Powder Based, a Unique Mixture of White Cement Based Putty Which Can Be Concrete/mortar Walls (Internal and External) and Ceilings.

Magitech Putty has more Adhesive Strength Providing a Permanent Strong base and Whiteness Which Ensure a Longer Life for The Painted Surface.

Where To Use :

Concrete / Mortar walls (Internal & External) and Ceiling.

Feature :



Excellent Abrasion
Resistance



Scratch
Resistance



Water Resistant &
Reduce Cracking



UV Resistant

Coverage : 500 to 600ft² per 40kg Bag.

Packing : 20kg / 40kg Bag.

વાપરવાની રીત :

મેજિટેક સ્માર્ટસેટ વોલપુટી ની 40kg ની બેગ માં 10/12ltr પાણી મિક્સ કરવું. ત્યારબાદ તૈયાર થયેલ મિશ્રણ ને પુટી પતરા વડે દીવાલ પર લગાડવી.

ફાયદાઓ :

દીવાલ નું આયુષ્ય વધારે છે. તેમજ દીવાલ ને વોટરપ્રૂફ અને લીસી બનાવે છે.

કવરેજ : 500 થી 600 ચો.ફુટ પ્રતિ 40kg બેગ.

પેકિંગ : 20kg/40kg બેગમાં ઉપલબ્ધ.

SMART JOINT BLOCK JOINTING MORTAR



02

Where To Use :

Jointing and bonding of AAC Blocks, Concrete Block, fly-Ash Brick etc.

Feature :

Smart Joint Block Joint Mortar Gives Excellent Bonding To The Blocks / Bricks.

Pre - Mixed, Only Water To Be Added.

No Water Curing Required.

Easy Spread And Creamy Workability.

Coverage :

Smartjoint Mortar is Approx 110sq.ft With An Average Thickness Of 2,3mm Joint Thickness For a bag of 40kg.

Packing : 40kg Bag.

TECHNICAL INFORMATION :

PROPERTIES	RESULTS
Appearance	Powder
Color	Gray
Water Demand	25 -30%
Hard dry	24 hours
Pot life approximately	2hrs@27C
Self curing	Yes
Tensile Adhesion Strength	0.8N/sq.mm

વાપરવાની રીત :

મેજન્ટેક સ્માર્ટ જોઇન્ટ મોરટાર ની 40kg બેગ મા 10 થી 12 લીટર પાણી મીક્સ કરો અને ત્યારબાદ તેનો ઉપયોગ કરવો.

ક્યાં વાપરવું : એ.એ.સી.બ્લોક, આર.સી.સી. બ્લોક ને જોડવા માટે.

ફાયદાઓ : દીવાલો ની બોન્ડીંગ સ્ટ્રેન્થ માં વધારો કરે છે પાણી છાટવા ની જરૂર પડતી નથી.

(ઉપરોક્ત કવરેજ સપાટીની સ્થિતિ પર આધાર રાખે છે)

પેકિંગ : 40Kg બેગમાં ઉપલબ્ધ.

SMART FIX TILE ADHESIVE NSA - SILVER



03

Where To Use :

Vitrified Tiles, Ceramic Tiles, Porcelain Tiles etc.

Feature :



High Adhesive Bond Strength



Non - Sink and Waterproof



Easy - Mixing Application



Good Slip Resistance



Early Strength Gain



Polymer Modified



Self Cure

Coverage : 40 to 50ft per 20kg Bag
3mm Thickness of Layers.

Packing : 20kg Bag.

Storage : 6 month of Self life is Kept Under Room Temperature (I.e.27c)

TECHNICAL INFORMATION :

PROPERTIES	RESULTS
Appearance	Grey Colour Powder
Adhesive Strength	> 0.5 N/mm ²
Sheer Adhesive Strength	> 1 N/mm ²
Adjustability in Minutes	> 20 Minutes
Open Time in Minutes	> 25
Density	1.95g / cc

વાપરવાની રીત :

20kg બેગ માં 4થી 5Ltr પાણી નાખીને બરાબર મિક્સ કરીને ટ્રોવેલ (ચુનાઈડુ) ની મદદ થી લગાવવું.

ક્યાં વાપરવું : અંદર ના ફ્લોરિંગ એરિયા અને નાની ટાઈલ્સ લગાડવા માટે.

કવરેજ : 40 થી 50 ચો.ફુટ પ્રતિ 20kg બેગ.
(3mm નું પડ લગાવવું)

પેકિંગ : 20kg બેગમાં ઉપલબ્ધ.

SMART FIX TILE ADHESIVE NSA - GOLD



04

Where To Use :

Vitrified Tiles, Porcelain Tiles, Sandstone, Lappato Ceramic Tiles, Line Stones, Marble Interior Floor & Wall.

Feature :

 High Adhesive Bond Strength

 Easy - Mixing Application.

 Polymer Modified

 Non - Shrink And Waterproof.

 Self Cure

Coverage : 40 to 50ft per 20kg Bag
3mm Thickness of Layers.

Packing : 20kg Bag.

Storage : 6 month of Self life is Kept Under Room Temperature (i.e.27c)

TECHNICAL INFORMATION :

PROPERTIES	RESULTS
Appearance	Grey Colour Powder
Adhesion Strength	> 1.05 N/mm ²
Adhesion Strength	> 1.4 N/mm ²
Adjustability in Minutes	> 20 Minutes
Open Time in Minutes	> 25 Min

વાપરવાની રીત :

20kg બેગ માં 4થી 5ltr પાણી નાખીને બરાબર મિક્સ કરીને ટ્રોવેલ (ચુનાઈડુ) ની મદદ થી લગાવવું.

ક્યાં વાપરવું : સીરામીક તથા પિટ્રિફાઈડ ટાઈલ્સ તેમજ પોસેલિન ટાઈલ્સ, ચોટાડવા માટે.

કવરેજ : 40 થી 50 ચો.ફુટ પ્રતિ 20kg બેગ.
(3mm નું પડ લગાવવું)

પેકિંગ : 20kg બેગમાં ૬પલબ્ધ.

SMART FIX TILE ADHESIVE NSA - PLATINUM



05

Where To Use :

Ceramic Tiles, Proceline Tile, Vitrified Tiles
Granite Stone, Heavy Tiles, Mosaic tiles,
Corrosive stone, Marble.

Feature :

 High Adhesive
Bond Strength

 Easy - Mixing
Application

 Self Cure

 Non - Srink and
Waterproof

 Easy Strength
Gain

Coverage : 50 to 60sq.ft per 20kg bag
3mm Thickness of Layers.

Packing : 20kg Bag.

Storage : 6 month of Self life is Kept Under
Room Temperature (i.e.27c)

TECHNICAL INFORMATION :

PROPERTIES	RESULTS
Appearance	Grey & White Colour Powder
Tensile Adhesion @28 Day	> 1.05 N/mm ²
Shear Adhesion Strangth @28 Day	> 1.4 N/mm ²
Adjustability in Minutes	> 20 Minutes
Open Time in Minutes	> 25 Min
Self Curing	Yes
Pack Size	20 Kg

વાપરવાની રીત :

20kg બેગ માં 4થી 5Ltr પાણી નાખીને બરાબર મિક્સ કરીને ટ્રોવેલ (ચુનાઈડ) ની મદદ થી લગાવવું.

ક્યાં વાપરવું : મોટી સાઈઝ ની વિટ્રિફાઈડ ટાઇલ્સ, ગ્રેનાઈટ તથા મકાન ની અંદર ની તેમેજ બહાર ની દીવાલ ઉપર લગાડવા માટે.

કવરેજ : 50 થી 60 ચો.ફુટ પ્રતિ 20kg બેગ (3mm જું પડ લગાવવું)

પેકિંગ : 20kg બેગમાં ઉપલબ્ધ.

05

SMART POXY EPOXY GROUT



06

Where To Use :

Wall Tiles, Floor Tiles, Swimming Pool, Heavy Traffic Area, Hygienic Tiles, Chemical Resistance Area.

Feature :



Stain Free



Chemical & Temperature Resistance



Water Cleanable



Easy Strength Gain



Anti-Bacterial Fungus



Easy to Apply

Coverage : Depend on Joint Width, Depth.

Packing : 1kg, 5kg, Bucket & Box.

Glitter Packing : 40gm & 200gm.

TECHNICAL INFORMATION :

PROPERTIES	RESULTS
Joint Width	2 to 15mm
Gel Time	60min.
Setting Time	48hr.
Specific Gravity	1.75
Water Absorption	Nil

વાપરવાની રીત :


90 ગ્રામ હાર્ડનર ને 180 ગ્રામ રેજીન સાથે મિક્સ કરી ને તેમાં પીગમેન્ટ પાવડર ઉમેરી ને પેસ્ટ બનાવી.

ત્યારબાદ જોઇન્ટ માં ભરવી અને 30 મિનિટ પછી સ્પંજ વડે સાફ કરવું.

ક્યાં વાપરવું : અંદર તથા બહાર ને ટાઇલ્સ વરચેના જોઇન્ટ ભરવા માટે તેમજ ગ્લેઝ, સ્ટ્રિમિંગપૂલ તથા ઘાબા ઉપર ની ટાઇલ્સ જોઇન્ટ ભરવા.

પેકિંગ : 1kg , 5kg બકેટ & બોક્સ માં ઉપલબ્ધ.

TILESEALER TILE GROUT

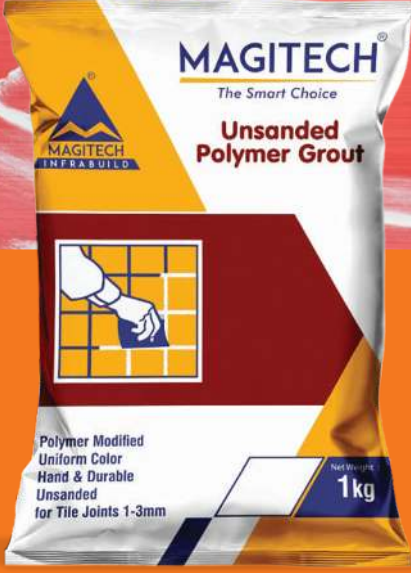

07

Where To Use :

Vitrified Tiles, Ceramic Tiles, Wall and Floor Tiles, Interior and Exterior.

Feature :



Stain Free



Durable & Hard with Joints



Anti-Bactrian Fungus



Water Cleanable



Non Cracking



Easy to Apply and Clean

Coverage : Depend on joints Width & Depth.

Packing : 1kg & 20kg Bag.

TECHNICAL INFORMATION :

PROPERTIES	RESULTS
Pot Life Open	120 Minutes
Open Time	60 Minutes
Adujustability	20 Minutes
Initial Setting Time	2 Hours
Final Setting Time	8 Hours
Shrinkage	< 0.1%

વાપરવાની રીત :

1kg ટાઇલસીલર ગ્રાઉટમાં 250 થી 300ml પાણી મિક્સ કરી અને ટ્રોવેલ (ચુનાઈડુ) અથવા પતરા થી જોઈન્ટ્સ ભરવા.

ક્યાં વાપરવું : વિવિધ રંગ ના બારીક સીમેન્ટીયસ પાવડર સિરામિક ટાઇલ્સ, પિટ્રિફાઈડ ટાઇલ્સ, ગ્રેનાઈટ અને ગ્લાસ મોઝેક ના સાંધા ભરવા માટે.

કવરેજ : સાંધાની પહોળાઈ અને ઊંડાઈ પર આધાર રાખે છે.

પેકિંગ : 1kg & 20kg બેગ માં ઉપલબ્ધ.

07

SMART BASE FLOOR HARDNER



08

Smartbase Floor Hardner :

Smart Base Floor hardner Special are controlled, factory blended powder which are ready to use on site.

They contain specially hardwearing aggregates which have been selected for abrasion and wear resistant properties as well as shape and size.

Smart base floor hardner special is supplied ready to use on site.

Feature :



Ready to Use



Abrasion Resistant Surface



High impact Resistance Provides a Hand



Makes Floor Dust Proof

Coverage : Low Area 3.5kg/m²
Medium Area 5kg/ M²
Heavy Areas 7kg/m²

TECHNICAL INFORMATION :

PROPERTIES	RESULTS
Appearance	Brown Liquid
Specific Gravity	1.05-1.10@25°C
Chloride Content	NIL
Air Entrainment	Less than 15%
Alkali Content	Typically less than 5.0g
Na2O Equivalent	Ltr of Admixture

Packing : 25kg Bag.

વાપરવાની રીત :

RCC ના ફ્લોરિંગની સપાટી પર છંટકાવ કરવામાં આવે છે ત્યારબાદ તેના ઉપર ટ્રીમીક્ષ મશીન ડીશ ફેરવામાં આવે છે જેથી કરી ને સરફેસ ની તાકાત વધી જાય છે.

ક્યાં વાપરવુ : ફેક્ટરી, શોપિંગ મોલ, પાર્કિંગ એરિયા, સર્વિસ સ્ટેશન, રેસ્ટોરન્ટ, મ્યુઝિયમ.

પેકિંગ : 25kg બેગ માં ઉપલબ્ધ.

08

SMARTEX WALL TEXTURE



Description :

Magitech Smartex Wall Texture are Made up to High Grade Water Based Acrylic/Pure Acrylic/Silicone Emulsion, Premium Natural Crushed Stone & Imported Additives for Decoration & Protection of Interior and Exterior Wall.

Feature :



UV Resistance



Environment Friendly



Application on Many kinds of Surfaces



Low Cost

Coverage : Depend on Surface and Texture.

Packing : 20kg & 25kg Bag.

મેજટેક ટેક્ષચર :

મેજટેક સ્માર્ટેક્સ વોલ ટેક્ષચર એ ઉચ્ચ ગુણવત્તા વાળું એકેલિક અને સિલીકોન ઈમલ્સન તથા નેચરલ ક્શ કરેલા સ્ટોન તથા ઈમ્પોટેડ કેમિકલ્સ વડે બનાવામાં આવે છે.

અંદર ની તથા બહાર ની દીવાલ ના ડેકોરેશન તથા પ્રોટેક્શન માટે થાય છે.

આ ઉપરાંત નીચે પ્રમાણે ના ટેક્ષચર ઉપલબ્ધ.

ગ્રેન્યુલ્સ, ફ્લેક્સ, સ્પ્રેકોટ, મલહાર, ફાઈન ફ્લેક્સ, એકેલિક બ્રીક્સ, રોલર કોટ વગેરે.

ક્યાં વાપરવું :

શોપિંગ મોલ, બંગ્લોઝ અને મકાન ની અંદર ની તથા બહાર ની દીવાલ ના ડેકોરેશન માટે.

પેકિંગ : 20kg/25kg બેગ માં ઉપલબ્ધ.

BUILD PLAST READY MIX PLASTER




10

Discription :

Magitech Ready Mix is a ReadyMix Cement Plaster with High Quality Polymer Additives Material.

it is ideal for wall, Roof, Ceiling and Plastering Purpose.

Feature :

 Save work time

 Reduce Wastage

 High Quality Results

 Easy to Transport and Store

 Cost effective Solution

Coverage : 0.16-0.23k/sq.ft/mm**

Packing : 40kg Bag.

TECHNICAL INFORMATION :

PRODUCT	RESULTS
Type	Interior, Exterior, Ceiling Surface
Main Binder	Portland Cement
Aggerate	Dust Free graded Processed Sand
Additives	Water Soluble Additives for Better Efficiency, Bindings, Water 1.2-1.6 kg/liter Unit
Compressive Strength	Retaining and Strength
Bulk Density	More than 4 in 28 day

મેજટેક રેડીમિક્સ પ્લાસ્ટર :

મેજટેક રેડીમિક્સ પ્લાસ્ટર એ તેંચાર પાણી નાખી ને વપરાતું ઉચ્ચગુણવત્તા વાળું પ્લાસ્ટરિંગ મોર્ટાર છે. અંદર અને બહાર ના પ્લાસ્ટર કરવા માટે વપરાતો ઉચ્ચકવોલિટી પાવડર છે.

ક્યાં વાપરવું : બ્રિક્સ, એ.એ.સી. બ્લોક, સ્ટોન અને આર.સી.સી ઉપર પ્લાસ્ટર લગાવવા માટે.

પેકિંગ : 40kg બેગ માં ઉપલબ્ધ.

MAGITECH SMARTER SBR



11



Where To Use :

Water Proofing And Repairing Structures Surface Treatment And Protecting As A Bond Coat Plaster To Plaster, Concrete To Old Concrete, Plaster To Concrete Masonry to Stone Work etc.

Feature :

Simple To Use.

Provides Waterproof Screeds Plaster.

Prevents Leakage Is Dempres. Reduce Drying Aging Shrinkage, Cracks.

Useful As A Bonding Between Old And New Concrete Surface.

Packing : 500ml, 1ltr, 5ltr, 20ltr.

TECHNICAL INFORMATION :

PROPERTIES	RESULTS
Appearance	Free Flowing Liquid
Colour	Milky White
Specofic Gravity @30c.gm/cc	1.02 + 0.02
Non Volatile Matter %	30 to 32
PH value	7 - 9
Bond Strength, N/mm ²	5
Chemical Resistance	Resists Mild Acids & Alkalies
Freeze thaw Resistance	Excellent

વાપરવાની રીત :

2Ltr પાણીમાં 1Ltr મેજીટેક સ્માર્ટર એસબીઆર અને 4.50kg સિમેન્ટ નુ મિશ્રણ તૈયાર કરી બ્રશ વડે સપાટી પર લગાવવું.

ક્યાં વાપરવુ : વોટરપ્રૂફિંગ તેમજ પ્લાસ્ટરમાં જુના આર. સી. સી. જોડાણ કરવા માટે.

પેકિંગ : 500ml, 1Ltr, 5Ltr, 20Ltr, માં ઉપલબ્ધ.

રેસીયો : 1:1:5 (SBR:પાણી:સિમેન્ટ)

MAGITECH MW+



12

Where To Use :

Basement, Roof Slabs and Screeds, water tanks & water retaining structures, bathrooms & balconies.

Feature :

Increase Compressive Strength.

Concrete Containing Magitech MW+ is Resistant to Water.

Reduce Permeability and Porosity which Makes it a Water Proof.

it Resist Leakage/Capillary in Concrete Structures.

Packing : 1ltr, 5ltr, 10ltr, 20ltr.

TECHNICAL INFORMATION :

PROPERTIES	RESULTS
Appearance	Free Flowing Liquid
Colour	Wine Red
Sp.gr@25°C	1.04 - 1.09
Non Volatile Content	13.5-14.5%
Compressive Strength	As per the Standard
N/mm ²	-
PH value	11.0 -14.0

વાપરવાની રીત :

50kg સિમેન્ટ માં 175ml થી 225ml નાખવું.

ફાયદાઓ :

સ્લેબ ની તાકાત વધારે છે.

કોંક્રિટ ની ચીકાશ વધારે છે.

કલોરાઇડ ફી હોવાથી સળિયા માં કાટ લાગતો નથી.

પેકિંગ : 1ltr, 5Ltr, 10Ltr, 20Ltr, માં ઉપલબ્ધ.

SMARTSEAL CRACK FILL



13

Where To Use :

External & internal Crack Repair up to 5mm in Width hair line cracks in painted Surface that Result in External Water Leakage.

Feature :

Ready to Use Product.

Setting Time 3 Hour.

Fill Internal & external Plastered Brick Masonry Wall Crack.

Water Resistance.

Easily over Coated by emulsion Paints.

Any Surface bonding.
(Plaster, Pop, Wood, R.C.C, Joint of Window)

Packing : 1kg, 5kg.

TECHNICAL INFORMATION :

PROPERTIES	RESULTS
Appearance	Smooth & Thick Paste
Color	Off White
Density at 30°C	-1.45 ± 0.1
Non volatile content	Approx 74 + / -2%
Extention Recovery	Approx 60%
Water Resistance	Excelent
Volume Shrinkage	Approx 22%

મેજટેક સ્માર્ટસીલ :

મેજટેક સ્માર્ટસીલ કેકફીલ એ તૈયાર એકેલિક બેઝ પેસ્ટ છે.

કયાં વાપરવું :

અંદર ની અને બહાર ની દીવાલ ની તિરાડ અને સાંઘા ભરવા માટે.

પેકિંગ : 1kg, 5kg, માં ઉપલબ્ધ.



Where To Use :

- Core Cutting hole.
- Tiles on stone on wood.
- Cement Articles to Cement Article.
- Fill the tiles joint on Terrace.
- Bathroom / Basement Crack Filling.

Feature :

- Suitable for fixing Vitrified Tiles for floor & Wall.
- Used For Spot bonding.
- Fast Cure. & Excellent squeezability.
- Very Good Strenght.

Application Procedure :

- Mix Part (A) & Part (B) Properly and then a Apply.

Packing : 500gm, 1kg & 5kg

વાપરવાની રીત :

પાર્ટ A તથા પાર્ટ B સમપ્રમાણમાં લઈ ને મિક્સ કરીને પેસ્ટ બનાવવી ત્યારબાદ લાકડું તથા પથ્થર તથા સ્ટીલ ના પાર્ટ ચોટાડવા માટે.

ક્યાં વાપરવું :

મારબલ થી મારબલ ને જોડવા માટે.
ગ્રેનાઈટ થી ગ્રેનાઈટ ને જોડવા માટે.
પિટ્ટિફાઈડ ટાઈલ્સને વૂડ સ્ટીલ અથવા એલ્યુમિનિયમ સપાટી સાથે જોડવા માટે.
1mm થી 50mm ની ક્રેક અથવા જોઈન્ટ ને સીલ કરવા માટે.

પેકિંગ : 500gm, 1kg, 5kg, માં ઉપલબ્ધ.

PRIME COAT WATER REPELLENT



15

What is Magitech Primecoat Water Repellent :

Magitech Prime Coat Is Modified Co-Polymer Emulsion Used As A Clean Coat Lacquer and water replant.

Magitech Primecoat has improved Physical Strength, and Superior Adhesive to old Concrete, Musonry, Bricks, and many other Surfaces.

Where to Use :

Brick Work, Concrete, Cement Bonding Natural and Cast Stone.

How to Use :

Apply Direct from container by Brush and Spray on Clear Surface.

Coverage : Approx coverage 45 to 55sqft per litre one coat depending on Substrates.

Packing : 1, 5, 10, 20, 50ltr.

વાપરવાની રીત :

આર. સી. સી. પતરા, એલીવેશનના નળીયા બહારની દિવાલના કલર ઉપર વાપરી સકાય છે. સ્પ્રે અથવા બ્રસથી લગાવી સકાય છે.

કવરેજ : એપ્રોક્ષ કવરેજ 45 થી 50 ફુટ/1Ltr, સપાટી પર આધાર રાખે છે.

પેકિંગ : 1Ltr, 5Ltr, 10Ltr, 20Ltr, 50Ltr, માં ઉપલબ્ધ.

ફાયદા : ચણતર તથા પ્લાસ્ટર અને પોલાણ વાળી સપાટી માં સહેલાઈ થી અંદર ઉતરી જાય છે.

લગાવ્યા પછી સપાટી ના દેખાવ માં કોઈ ફેરફાર થતો નથી.

લીલ અને સેવાળ દીવાલ પર જમવા દેતું નથી.



16

What is Smart Solid Membrane :

Magitech Smartsolid membrane is a specially formulated highly permanent elastic Cold Applied & Cold Curing waterbased, Crack bridging polyurethane membrane used for long-lasting waterproofing.

Application Process :

The Surface Must be Pre-Wated with Water & Brought to a touch dry state.

Then apply a first coat of Magitech Membrane Chemical.

At Least Two Coats are Recommended of Magitech Modified Waterproofing membrane.

Where to Use :

Roof, Terrace, External Wall, Verticals Wall Swimming Pools, Toilet, Bathroom etc.

Coverage : 12-15ft² /Ltr/2Coat@1.2mm Thickness.

(Do not Dilute with water)

Packing : 5Ltr, 10Ltr, 20Ltr.

વાપરવાની રીત :

પ્રથમ કોટ : Primecoat નું પ્રથમ કોટ મારવું.

દોષ કોટ : Smartsolid Membrane ના 2 કોટ વ્રશ અથવા રોલર થી મારવા 1ltr માં 200ml પાણી ઉમેરવું.

કવરેજ : 12-15ft² /Ltr/2Coat@1.2mm Thickness
(પાણીથી પાતળું કરવું નહિ)

પેકિંગ : 5, 10, 20, લીટર માં ઉપલબ્ધ.

કાચઢા : ટકાવ, મજબૂત, અને વોટરપ્રૂફ ટરેક પ્રકાર ના કુદરતી માર થી રક્ષણ આપે છે.

SMART COVER DAMP - PROOF

WATERPROOFING CHEMICALS



17

Where to Use :

Roof, Terrace, External Wall, Verticals Wall Swimming Pools, Toilet, Bathroom etc.

Application Process :

Add 4 to 5ltr Water in 20Ltr smartcover Demproof.

Minimum 2 Coat Apply.

Coverage : 30 to 35Sq.ft / Ltr/2Coats.

Packing : 1, 4, 10, 20ltr.

TECHNICAL INFORMATION :

PROPERTIES	RESULTS
Drying Time	4-6 Hours
Coverage	30-35 sq.ft./L/2 coats
Finishing	Matt
Application Tool	By Roller, Brush or Airless Spray
Available in (Ltr.)	1, 4, 10, 20

વાપરવાની રીત :

પ્રથમ કોટ : PrimeCoat TransParent લગાવવું.

બીજો કોટ : Smartcover Dampproof માં 20% પાણી મિક્સ કરવું.

ત્રીજો કોટ : Smartcover Dempproof માં 12% પાણી મિક્સ કરવું.

ક્યાં વાપરવું : ટેરેસ, સિમેન્ટ ના પતરા અને ઉભી સપાટી ને વોટરપ્રૂફ બનાવવા માટે.

ફાયદાઓ :

ફાઈબરયુક્ત હોવાથી સપાટી ના ઉપરના વાઈબ્રેશનથી તિરાડો ખુલતા અટકાવે છે તેમજ ચુપી રેક્રિસ્ટન્ટ તેમજ વાઈટ હોવાથી ટેરેશનુ તાપમાન ઘટાડે છે.

પેકિંગ : 1, 4, 10, 20, લીટર માં ઉપલબ્ધ.

MAGITECH TILE - CLEANER



18

What is Magitech Tile Cleaner :

Magitech Tile Cleaner is a High Quality rapid Active cleaner and Degreasing solution for use on tiles, Bath tubs wash basin, concrete etc.

Where to Use :

Cleaning for Degreasing Tiles in Bathroom & Toilet Wash Basin etc.

Caution

Do not Mix any other House hold Cleaner or acid. avoid Contact of Eyes and skin.

Advantages : Easy to use, Fast Acting.

Packing : 500ml, 1ltr.

TECHNICAL INFORMATION :

PROPERTIES	RESULTS
Active ingredients	Hydrochloric acid solution, Cleaning agent perfume & water
Colour	Pink
Products Class	A Ceramic Cleaner
Area Coverage	4-5 sq.mtr./liter
Soaking Times	5 minutes
Viscosity at 27c	Equal to Water

વાપરવાની રીત :

મેજિટેક ટાઇલ્સ ક્લીનર ને ટાઇલ્સ પર લગાવી 7 મિનિટ રાખવું ત્યારબાદ પાણીથી સાફ કરવું.

ક્યાં વાપરવું :

ટાઇલ્સ પર લાગેલ સિમેન્ટ તથા ઓઇલ ના ડાઘ દૂર કરવા માટે.

પેકિંગ : 500ml, 1 લીટર માં ઉપલબ્ધ.

MAGITECH TILE - SPACER

19



Discription :

Magitech Tile Spacer is made using plastic and are made to eithstand the daily Usage. We are one of the Main Companies. Providing these Products to Clients in Different sizes.

Benifits :

Perfact space between two tiles and Leter filled by sparkle Colour gives Stuning Looks to your floor.

Where to Use :

Spacers are Used to adjust the Perfact Distance between two Tiles, which are letter filled by grout.

Available Size :

2mm, 3mm, 4mm, 5mm, & 8mm.
Also Available - Tile Leveling, Jack, Spinner Cap.

Available Packing :

100pcs in One Box.

19

INTERIOR EMULSION-SERIES



20



PILOT (INTERIOR EMULSION) :

Magitech Pilot Interior Emulsion is Our Fast - Drying Paint. Emulsions are High - Quality Weather Based Paints That Dry Quickly and Have Little Smell. Enjoy a Rich Matt Finish On your Interior Walls By Applying This Excellent Acrylic Product After The Wallputty and Primer.

UNIC TOUCH (PREMIUM EMULSION) :

Magitech Unic Touch Premium Emulsion is a Superior Grade Paint That will Give a Richer Look to your Walls. It is a Diamond Among Emulsions and Fit For Interior of Kings and Queens. Sometimes, you Need to Spend a Little Extra on The Paint in Order to do Justice to Great Interior Decor.

ROYAL SHIELD (LUXURY EMULSION) :

Magitech Royal Shield Luxury Emulsion is For Kings. Then Magitech Royal Shield Luxury Emulsion is for Emperors. It is the Most Luxurious & Extravagant Product in our Interior Line - up. You Can Relax and Wash it Without a Worry. Get the Ultimate Shining Walls with our Superior Acrylic Product.

TECHNICAL INFORMATION :	PILOT (Interior Emulsion)	UNIC TOUCH (Premium Emulsion)	ROYAL SHIELD (Luxury Emulsion)
Drying Time	4 - 6 Hours	4 - 6 Hours	4 - 6 Hours
Coverage	50-65 sq.ft./L/2 Coats	100-120 sq.ft./L/2 Coats	50-65 sq.ft./L/2 Coats
Finishing	Matt	Mid Shine	High Shine
Application Tool	By Roller, Brush or Airless Spray	By Roller, Brush or Airless Spray	By Roller, Brush or Airless Spray
Available in (Ltr.)	1, 4, 10, 20	1, 4, 10, 20	1, 4, 10, 20

EXTERIOR EMULSION-SERIES



21

MESSY GUARD (EXTERIOR EMULSION) :

If you Want an Economical Acrylic Emulsion Paint That will Be Light on your Wallet and Yet Make your Wall Look Great, Then you Should Go for Magitech Messy Guard Exterior Emulsion. Apply Primer, Wallputty and then Primer Again Before Coating with the Emulsion for the Best Results.

ANTIQUE WEATHER (PREMIUM EMULSION) :

Magitech Antiuue Weather Exterior Emulsion Comes with a 5 Year Warranty. you can trust this DUrable Paint to Keep your Exterior Wall Looking Beautiful for Long. The Special Formulation Prevents Algae and Mass Growth Even Under Extreme Weather Conditions.

SUNSHINE WEATHER (LUXURY EMULSION) :

Magitech Sunshine Weather Luxury Exterior Emulsion is One Step Ahead of Magitech Antique Weather Luxury Exterior Emulsion. Magitech Sunshine Weather Luxury Exterior Emulsion Keeps Building Beautiful and Well Maintained for as Long 7 Years with its Crack Bridging Properties. this Rich Paint can Fight Every Weather and it Does So with Oodles of Finess.

TECHNICAL INFORMATION :	MESSY GUARD (Exterior Emulsion)	ANTIQUE WEATHER (Premium Emulsion)	SUNSHINE WEATHER (Luxury Emulsion)
Drying Time	4 - 6 Hours	4 - 6 Hours	4 - 6 Hours
Coverage	50-65 sq.ft./L/2 Coats	50-65 sq.ft./L/2 Coats	50-65 sq.ft./L/2 Coats
Finishing	Matt	Mid Shine	High Shine
Application Tool	By Roller, Brush or Airless Spray	By Roller, Brush or Airless Spray	By Roller, Brush or Airless Spray
Available in (Ltr.)	1, 4, 10, 20	1, 4, 10, 20	1, 4, 10, 20

MAGITECH BUILD UP PRIMER



22



BUILD UP – INTERIOR & EXTERIOR PRIMER

Exterior Need Priming As Much if Not More Than Interiors.

The Sun, Rain, Heat. Cold Different Weather Weather Conditions Will Take a Toll on Your Expensive Paint Unless you Prime the Surface Underneath Well.

Use Magitech Build up Exterior Wall Primer to Prepare the Rough Surfaces Outside your Home or Office Building into a Smooth Canvas.

Exterior Painting is a Laborious and Expensive Exercise and Proper Primer Coats will Ensure that your Investment Does Not Suffer Peeling or Cracking.

TECHNICAL INFORMATION :

BUILD UP

Drying Time

4 - 6 Hours

Coverage

50-65 sq.ft./L/2 Coats

Finishing

Matt

Application Tool

By Roller, Brush or Airless Spray

Available in (Ltr.)

1, 4, 10, 20

MAGITECH PURE DISTEMPER



PURE – ACRYLIC WASHABLE DISTEMPER


Magitech Pure Acrylic Washable Distemper is a Water – Based Economical Choice for Painting Interior Walls.

it Gives a Much Smoother Appearance than Traditional White – Wash. its Main Ingredients are Chalk, Lime, Water and Glue, Acrylic Distempers are Simple to apply.

TECHNICAL INFORMATION :	PURE
Drying Time	4 – 6 Hours
Coverage	30-40 sq.ft./L/2 Coats
Finishing	Mid Shine
Application Tool	By Roller, Brush or Airless Spray
Available in (Kg.)	2, 5, 10, 20

CERTIFICATE


फॉर्म क्रमांक - 2
Form RG - 2


भारत सरकार
Government of India
व्यापार चिह्न रजिस्ट्रार
Trade Marks Registry
व्यापार चिह्न अधिनियम, 1999
Trade Marks Act, 1999
व्यापार चिह्न के रजिस्ट्रेशन का प्रमाणपत्र, धारा 23 (2), नियम 56 (1)
Certificate of Registration of Trade Mark, Section 23 (2), Rule 56 (1)

प्रमाणपत्र क्रमांक: Trade Mark No. 5281881 दिनांक: 12/01/2022 अ.सं.क्र.सं. No. 2040


व्यापार चिह्न (Trade Mark) / representation as amended hereto, has been registered in the name(s) of:-
MAGITECH INFRABUILD PRIVATE LIMITED, LDAY NAGAR PART-1, AAKHODIYAR KRUPA, ST NO 15, 150 FEET RING ROAD, RAJKOT, GUJARAT, 360004, Private Limited Company, (Body incorporate)

In Class **2** Under No. **5281881** as of the date **12 January 2022** in respect of
PAINTS, VARNISHES, LACQUERS, PRESERVATIVES AGAINST RUST AND AGAINST DETERIORATION OF WOODS, COLORANTS, MERGENTS, RAW NATURAL RESINS; MEDALS IN FOIL AND POWDER FORM FOR PAINTERS, DECORATORS, PRINTERS AND ARTS INCLUDED IN CLASS 02.


MAGITECH PAINTS

दिनांक: 12th day of August, 2022

व्यापार चिह्न रजिस्ट्रार
Trade Marks Registry MUMBAI


Registrar of Trademarks

फॉर्म क्रमांक - 2
Form O - 2


भारत सरकार
Government of India
व्यापार चिह्न रजिस्ट्रार
Trade Marks Registry
व्यापार चिह्न अधिनियम, 1999
Trade Marks Act, 1999
व्यापार चिह्न के रजिस्ट्रेशन का प्रमाणपत्र, धारा 23 (2), नियम 62 (1)
Certificate of Registration of Trade Mark, Section 23 (2), Rule 62 (1)

प्रमाणपत्र क्रमांक: Trade Mark No. 3236915 दिनांक: 18/04/2016 अ.सं.क्र.सं. No. 1769

व्यापार चिह्न (Trade Mark) / representation as amended hereto, has been registered in the name(s) of:-
MAGITECH INFRABUILD PRIVATE LIMITED, TULSHI PARK STREET - 1, PLOT NO. 10, AT AJI DEM CHOWDKI, RAJKOT - 360007, MANUFACTURER AND MERCHANT, (Body incorporate)

In Class **19** Under No. **3236915** as of the date **18 April 2016** in respect of
BUILDING MATERIAL INCLUDED IN CLASS 19.

Trade Mark as amended

दिनांक: 18th day of March, 2017

व्यापार चिह्न रजिस्ट्रार
Trade Marks Registry MUMBAI


Registrar of Trademarks


भारत सरकार
Government of India
And
Government of Gujarat
Form GST REG-25

Certificate of Provisional Registration

1.	GSTIN	24AAJCM5680J1Z4
2.	PAN	AAJCM5680J
3.	Legal Name	MAGITECH INFRABUILD PRIVATE LIMITED
4.	Trade Name	MAGITECH INFRABUILD PVT LTD
5.	Registration Details under Existing Law	
	Act	Registration Number
(a)	TIN under Value Added Tax	24091501234
(b)	Central Sales Tax Registration Number	24591501234
(c)	Corporate Identity Number / Foreign Company Registration Number	u45203gg2014ptc081642
Date	25/06/2017	

This is a Certificate of Provisional Registration issued under the provisions of the Act.


भारत सरकार
GOVERNMENT OF INDIA
MINISTRY OF CORPORATE AFFAIRS
Registrar of Companies, Ahmedabad
RoC Bhavan , Opp Rupal Park Society , Behind Ankur Bus Stop , Naranpura

Certificate of Incorporation

[Pursuant to sub-section (2) of section 7 of the Companies Act, 2013 and rule 8 of the Companies (Incorporation) Rules, 2014]

I hereby certify that MAGITECH INFRABUILD PRIVATE LIMITED is incorporated on this Twenty Fourth day of December Two Thousand Fourteen under the Companies Act, 2013 and that the company is limited by shares.

The CIN of the company is U45203GJ2014PTC081642.

Given under my hand at Ahmedabad this Twenty Fourth day of December Two Thousand Fourteen.


VILAS SAMBAHJI HAJARE
Assistant Registrar of Companies
Gujarat

Mailing Address as per record available in Registrar of Companies office:
MAGITECH INFRABUILD PRIVATE LIMITED
TULSHI PARK STREET-1, PLOT NO.10, AT AJI DEM CHOWDKI,
RAJKOT - 360007,
Gujarat, INDIA



MAGITECH INFRABUILD PVT. LTD.

Follow us :    

Corporate Office :

Om Nagar Circle, 150ft Ring Road, Mavdi Plot, Rajkot - 360004.

Contact Us :

+91 76006 83943 | +91 80001 80004

Email Us :

info@magitech.co.in

Our Website :

www.magitech.co.in

Scan Me

